

legrand

Perfect FOR TRENDY INTERIOR DESIGNS



A reflection of contemporary style and functionality designed to marry contemporary border-less design with quality and function,

Galion's range of wiring devices is crafted with excellence, using only the best quality components.

SUMMARY

02-03	ELEGANT DETAILS THAT MAKE THE DIFFERENCE
04-05	MINIMALIST DESIGN WITH MAXIMUM FUNCTIONS
06-07	A GOOD PLACE TO STAY
08-09	JUST FEEL LIKE HOME
10-11	FINEST QUALITY COMPONENTS & MATERIAL
12-13	STRENGTH AND EASY INSTALLATION
14-16	CATALOGUE PAGES









MATT BLACK



The slim and fine chamfering at the edges, the slightly curved plate: the details that make the difference for an even more refined product.





The delicate silver or electroplated bar accentuate the modern and exquisite elements of a minimalist design.

GALION WIRING DEVICES





GALION OFFERS A WIDE SELECTION OF FUNCTIONS ABLE TO SATISFY REQUIREMENTS OF THE MOST CURRENT PROJECTS.











16 A single pole switches: 1 and 2-way and from 1 to 4 gang



16 A push buttons with or without bell marking



RLC + LED rotary dimmers

20 A double pole switches: 1 gang - 1 way with LED or with «water heater marking»

Fan stepless controls











1 or 2 gang 16 A Multistandard socket outlets

13 A 1 gang fused connection units, with or without switch and LED power indicator



with or without USB charger

Television sockets: female, «F» type and TV-FM-SAT



1 and 2 gang 13 A British standard socket outlets with or without LED power indicator,

Double USB Type A charger



Data sockets: simple and double RJ 45 Cat. 6













DND/CUR marking switches



DND/CUR sign and bell push button





Electromechanical or RFID Keycard switches



USB and HDMI socket



Shaver sockets



1 and 2 gang 13 A British standard socket outlets with USB chargers

The Multistandard socket outlets with USB charger combine standard power with the convenience of USB charging: your device plugs straight into the USB port, leaving the standard socket free. No need for bulky adaptors, and no need to compromise on running your other appliances as usual.

Equipped with two different USB charging ports, Type-A and Type- C^{TM} , 3 A – 5 V = 15W. With USB Type- C^{TM} making its way more and more into phones, tablets, etc. you are sure to be prepared for tomorrow - today.

TYPE-A

TYPE-C







BE FREE TO FEEL AT HOME, BUT WITH THE ADDED CONVENIENCE OF HOTEL SERVICES.
GALION PROVIDES ALL NEEDED FUNCTIONS FOR WELL-EQUIPPED AND COMFORTABLE SERVICED APARTMENTS.



The universal dimmer that dim and control dimmable LEDs and CFL, halogen or incandescent lamps. Enabling the customers to benefit of the entire potential of modern loads and helping them to create cosy interiors.











13 A 1 gang fused connection units, with switch and LED power indicator



45 A double pole switches 1 gang - 1-way, with LED and red rocker



45 A cooker units






09

legrand

FINEST COMPONENTS & MATERIAL



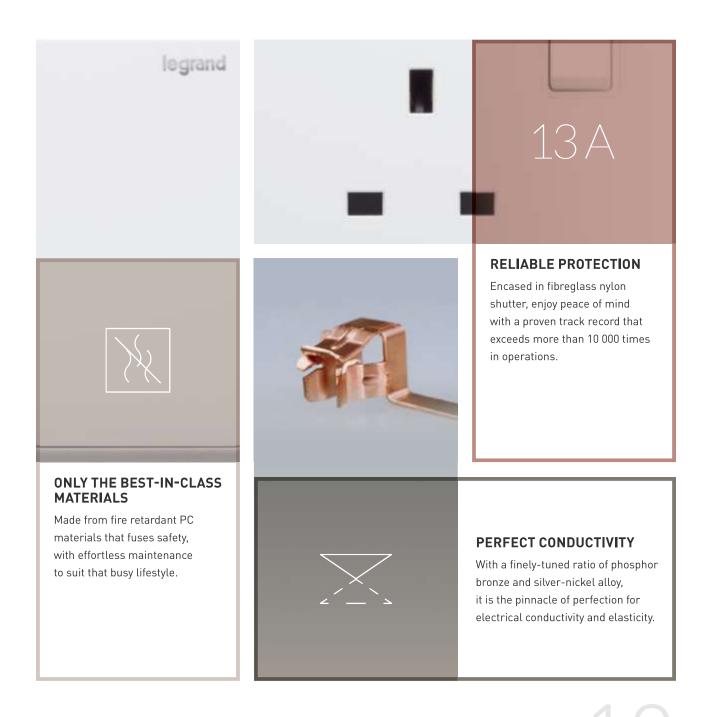





Strength AND AND INSTALLATION

COMPLETE PRODUCT

1 CATALOGUE = 1 READY TO INSTALL PRODUCT NUMBER FOR QUICK SELECTION







STRENGTH IN ELEGANCE

A honeycomb design supporting frame brings about the best stability and strength for electrical structures.









Experience assurance and security through installation with the new saddle-shaped terminal, which can fix up to three 4 mm² wires.



A soft protection film ensures the devices' cleanliness and neatness during installation.



Galion™

switches, push-buttons, dimmers, active compensator, fan controls and cooker units













Conform to IEC 60669-1 standard. Polycarbonate front cover plates Supplied with 2 screws M 3.5 for BS boxes. Supplied complete with plate Dim.: 86×80 mm

DIM.: 86 X 88 MM		
Pack	Cat.Nos	Single pole switches - 16 AX - 250 V \sim
8 8 8	2 824 00 2 824 00-C 2 824 00-C1	1 gang - 1-way
8 8 8	2 824 01 2 824 01-C 2 824 01-C1	1 gang - 2-way
8 8 8	2 824 13 2 824 13-C 2 824 13-C1	1 gang - intermediate
8 8 8	2 824 02 2 824 02-C 2 824 02-C1	2 gang - 1-way
8 8 8	2 824 03 2 824 03-C 2 824 03-C1	2 gang - 2-way White (Silver bar) Matt Black (Electroplate bar) Rose Gold (Electroplate bar)
8 8 8	2 824 04 2 824 04-C 2 824 04-C1	3 gang - 1-way ○ White (Silver bar) • Matt Black (Electroplate bar) • Rose Gold (Electroplate bar)
8 8 8	2 824 05 2 824 05-C 2 824 05-C1	3 gang - 2-way ○ White (Silver bar) • Matt Black (Electroplate bar) • Rose Gold (Electroplate bar)
8 8 8	2 824 06 2 824 06-C 2 824 06-C1	4 gang - 1-way White (Silver bar) Matt Black (Electroplate bar) Rose Gold (Electroplate bar)
8 8 8	2 824 07 2 824 07-C 2 824 07-C1	4 gang - 2-way White (Silver bar) Matt Black (Electroplate bar) Rose Gold (Electroplate bar)
		Double pole switches 20 A - 250 V \sim
		With earth link connector and amber LED power indicator
8	2 824 08	1 gang - 1-way White (Silver bar)
8 8	2 824 08-C 2 824 08-C1	Matt Black (Electroplate bar) Rose Gold (Electroplate bar)
8 8 8	2 824 14 2 824 14-C 2 824 14-C1	1 gang - 1-way with "water heater" marking
		Push-buttons 16 A - 250 V \sim
8 8 8	2 824 11 2 824 11-C 2 824 11-C1	1 gang - with "bell" marking

Pack	Cat.Nos	Push-buttons 16 A - 250 V \sim (continued)
8 8 8	2 824 10 2 824 10-C 2 824 10-C1	1 gang - without marking ○ White (Silver bar) • Matt Black (Electroplate bar) • Rose Gold (Electroplate bar)
		Rotary dimmers with neutral - 300 W RLC+LED
5 5 5	2 824 19 2 824 19-C 2 824 19-C1	Conform to IEC 60669-2-1 For all types of lamps: - dimmable LEDs: 5 W to 75 W - dimmable compact fluorescent lamps: 5 W to 75 W - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V White Matt Black Rose Gold
		Active compensator
1	0 401 49	Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption: 0.4 W
		Fan stepless controls
5 5 5	2 824 90 2 824 90-C 2 824 90-C1	○ White ■ Matt Black ■ Rose Gold
		Double pole switches 45 A - 250 V \sim
		With red LED power indicator
8 8 8	2 824 26 2 824 26-C 2 824 26-C1	1 gang - 1-way White Matt Black Rose Gold
8	2 824 27	1 gang - 1-way with red rocker
8	2 824 27-C 2 824 27-C1	Matt Black Rose Gold
		1 gang - 1-way with "cooker" marking - with red rocker
8 8 8	2 824 28 2 824 28-C 2 824 28-C1	○ White ● Matt Black ● Rose Gold
		2 gang (vertical) - 1-way with red rocker Dim.: 86 x 146 mm
8 8 8	2 824 29 2 824 29-C 2 824 29-C1	○ White ● Matt Black ● Rose Gold



Galion™

socket outlets, fused connection units and cable outlets











ate child i

		cover plates. Supplied with 2 screws M 3.5 for BS boxe 1 gang); 146 x 88 mm (2 gang)	es. Supplie	ed comple	te with plate. All sockets integrate child protection
Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V \sim	Pack	Cat.Nos	British Standard socket outlets 5 A - 250 V \sim
8 8 8	2 824 32 2 824 32-C 2 824 32-C1	Conform to BS 1363-2 1 gang single pole - switched	8 8 8	2 824 38 2 824 38-C 2 824 38-C1	Conform to BS 546 1 gang single pole - switched
8 8 8	2 824 80 2 824 80-C 2 824 80-C1	1 gang single pole - switched - with LED power indicator White Matt Black Rose Gold 2 gang single pole - switched	8 8 8	2 824 34 2 824 34-C 2 824 34-C1	Multistandard socket outlets 16 A - 250 V 1 gang - switched ○ White ● Matt Black Rose Gold
5 5 5	2 824 33 2 824 33-C 2 824 33-C1	○ White Matt Black Rose Gold	5 5 5	2 824 35 2 824 35-C 2 824 35-C1	2 gang - switched
5 5 5	2 824 81 2 824 81-C 2 824 81-C1	2 gang single pole - switched - with LED power indicator			Multistandard socket outlets 16 A - 250 V ∼ - with USB chargers 1 gang - switched USB charger Type-A, 12 W Consumption in passive mode < 0.08 W
		British Standard socket outlets 13 A - 250 V Conform to BS 1363-2 1 gang single pole - switched USB charger Type-A, 12 W	5 5 5	2 824 42 2 824 42-C 2 824 42-C1	White Matt Black Rose Gold 2 gang - switched USB chargers Type-A + Type-C, 15 W
5 5 5	2 824 41 2 824 41-C 2 824 41-C1	Consumption in passive mode < 0.08 W White Matt Black Rose Gold 2 gang single pole - switched	5 5 5	2 824 44 2 824 44-C 2 824 44-C1	Consumption in passive mode < 0.08 W White Matt Black Rose Gold
5 5 5	2 824 43 2 824 43-C 2 824 43-C1	USB charger Type-A + Type-C, 15 W Consumption in passive mode < 0.08 W White Matt Black Rose Gold Cooker units - 250 V	8 8 8	2 824 50 2 824 50-C 2 824 50-C1	Fused connection units - 13 A Conform to BS 1363 part 4 1 gang White Matt Black Rose Gold
5 5	2 824 25 2 824 25-C	Conform to IEC 60884-1 and IEC 60669-1 45 A double pole switch + 13 A British Standard switched socket and amber LED power indicators Dim.: 146 x 88 mm White	8 8 8	2 824 51 2 824 51-C 2 824 51-C1	1 gang - with switch
5	2 824 25-C1	Rose Gold British Standard socket outlets 15 A - 250 V	8 8 8	2 824 53 2 824 53-C 2 824 53-C1	○ White ● Matt Black ● Rose Gold
8 8 8	2 824 37 2 824 37-C 2 824 37-C1	Conform to BS 546 1 gang single pole - switched	8 8 8	2 824 54 2 824 54-C 2 824 54-C1	Cable outlets 1 gang - 45 A ○ White ● Matt Black ● Rose Gold
			8 8 8	2 824 52 2 824 52-C 2 824 52-C1	1 gang - 20 A



Galion™

TV and data sockets, USB chargers and accessories

Galion™

hotel equipment













2 824 16

Polycarbonate front cover plates Supplied with 2 screws M 3.5 for BS boxes Supplied complete with plate Dim.: 86 x 88 mm

Conform to IEC 60669-1 standard Polycarbonate front cover plates Supplied with 2 screws M 3.5 for BS boxes Supplied complete with plate

Pack	Cat.Nos	Television sockets
8 8 8	2 824 57 2 824 57-C 2 824 57-C1	Single TV socket, Female White Matt Black Rose Gold
8 8 8	2 824 49 2 824 49-C 2 824 49-C1	Single TV socket, "F" type White Matt Black Rose Gold
8 8 8	2 824 59 2 824 59-C 2 824 59-C1	TV-R-SAT sockets Low attenuation: 1.5 dB White Matt Black Rose Gold
		Data sockets
8 8 8	2 824 61 2 824 61-C 2 824 61-C1	RJ 45 Cat.6 UTP White Matt Black Rose Gold
8 8 8	2 824 63 2 824 63-C 2 824 63-C1	Double RJ 45 Cat.6 UTP White Matt Black Rose Gold
		Double USB Type-A chargers
5 5 5	2 824 47 2 824 47-C 2 824 47-C1	2.4 A - 5 V 12 W Consumption in passive mode < 0.08 W White Matt Black Rose Gold
		USB and HDMI data sockets
8 8 8	2 824 48 2 824 48-C 2 824 48-C1	○ White ■ Matt Black ■ Rose Gold
		Blanking plates
15 15 15	2 824 70 2 824 70-C 2 824 70-C1	○ White ■ Matt Black ■ Rose Gold
		Arteor adaptors
15 15 15	2 824 71 2 824 71-C 2 824 71-C1	For 2-module products White Matt Black Rose Gold

Pack	Cat.Nos	Hotel guest room indicators
1	2 824 17	Enable the guest to inform hotel staff of the room status Two settings are possible: - do not disturb (DND) - please clean-up the room (CUR) Indicator lamp and bell button Installed in the corridor Double functon: call indicator and bell button 1 gang, black touch plate
8 8 8	2 824 16 2 824 16-C 2 824 16-C1	DND/CUR control units for guest room Installed in the guest room Allow the user to select the desired setting White (Silver bar) Matt Black (Electroplate bar) Rose Gold (Electroplate bar)
		Keycard switches - 230 V \sim - 16 A
5 5 5	2 824 15 2 824 15-C 2 824 15-C1	Supplied with one card O White Matt Black Rose Gold
		RFID keycard switches - 230 V \sim - 16 A
5 5 5	2 824 18 2 824 18-C 2 824 18-C1	Compatible with ISO type contactless keycards O White Matt Black Rose Gold
1 1 1	2 824 39 2 824 39-C 2 824 39-C1	Shaver sockets Conform to IEC 61558-2-8 115/230 V - 20 VA - 50/60 Hz Power supply: 230 V - 50/60 Hz Suitable for use with European, British, Australian, Chinese and US 2-pin plugs Dim: 86 x 146 mm 2 outputs White Matt Black Rose Gold



Notes



Diegrand

Head Office

and International Department 87045 Limoges Cedex - France Tel: +33(0)5 55 06 87 87 Fax: +33(0)5 55 06 74 55